

Shock-Safe Fuseholder, 4.7 x 16 mm, Fingergrip, Rear-Side



250 VAC · 1 W/5A

See below:  
[Approvals and Compliances](#)

### Description

- Screw type fuse carrier

### References

Last order date: 30.04.2021

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

### Technical Data

Fuse-Link	4.7 x 16mm	Soldering Methods	Iron
Mounting	Panel mount, Rear Side		<a href="#">Soldering Profile</a>
Attachment	Fixing Nut	Contact Resistance	< mΩ at 100 mA
Terminal	Solder	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Rated Voltage	250VAC	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated current	5A	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated Power Acceptance IEC	1 W / 5 A @ Ta 23 °C	Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Degree of Protection	IP67	Dump Heat	acc. to NF C 20-604
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140	Climatic Composite	acc. to NF C 20-619 Phase D
Admissible Ambient Air Temp.	-40 °C to 85 °C	Admissible Torque on Fixing Nut	max 0.7 Nm
Climatic Category	40/085/21 acc. to IEC 60068-1	Nut	
Material: Socket	Thermoset, black	Panel Thickness	max 2 mm
Unit Weight	8.2 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	Type		

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

Approval Logo	Certificates	Certification Body	Description
GAM T1 <b>NNO</b>			




### Application standards


Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

**Compliances**

The product complies with following Guide Lines

Identification	Details	Initiator	Description
CE		SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	<a href="#">UKCA declaration of conformity</a>	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]  33.5 mm

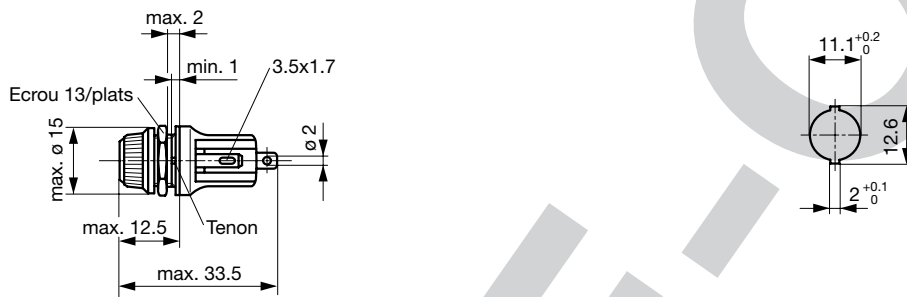

Mounting holes

**All Variants**

Cap	Degree of Protection	Order Number
● Fingergrasp	IP67	7090.6020

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit Bulk (10 pcs.)

PHASER