


TEST JACKS, TEST PROBES

Ø 2 mm



Contact system

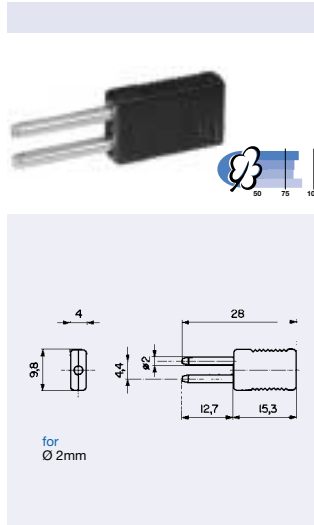

Rated current

6,3 A

Contact resistance at 20 mV

< 7 mΩ

Insulation resistance, 1 min. contact to contact

Contact/mounting plate

> 10⁴ MΩ

Dielectric strength, 50 Hz, 1 min. contact to contact

Contact/mounting plate

> 1,8 kV

Temperature at no current

-25 °C up to +100 °C

at rated current

-25 °C up to +70 °C

Solderability

2 sec., 235 °C IEC 68-2-20 test Ta, test method 1

Resistance to soldering heat

Surface of contacts (average thickness)

2,0 μm Au

Tin-plated contacts on request

Type

PS

Order No.
Color

0040.1161	black
0040.1162	red